

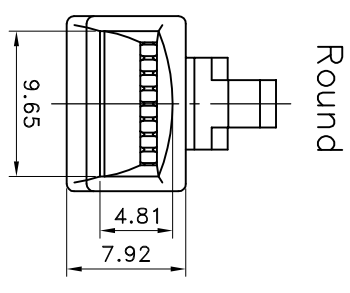
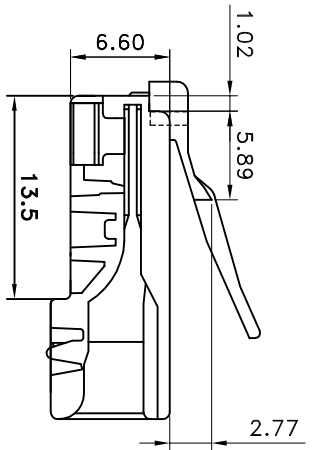
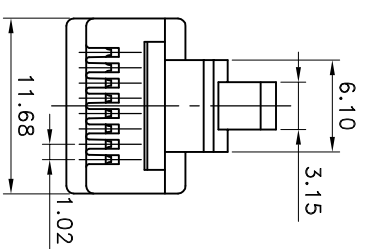


REV	DATE	变更内容	修改
	2014/09/03	MODIFICATION	DRAWN

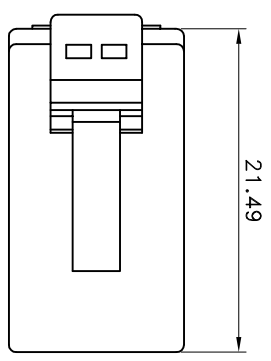

Round

Flat

- SPECIFICATIONS**
- 1. ELECTRICAL:**
 UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS AC.
 WITHSTAND VOLTAGE TIME: 60S.
 INSULATION RESISTANCE: 100 M Ω.
 TERMINATION: RESISTANCE: 20m Ω MAX AFTER ENVIRONMENTAL TESTING.
- 2. MECHANICAL:**
 CABLE-TO-PLUG TENSILE STRENGTH: 20POUND MIN.
 DURABILITY: 200 MATING CYCLES.
- 3. MATERIAL & FINISH:**
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 CONTACT BLADE: COPPER ALLOY.
 CONDUCTOR : STRANDED & SOLID WIRE . 24AWG, 26 AWG.
 (It can be used for the wire OD from 0.96-01.02)
 GOLD PLATING: 3u"-50u" ARE AVAILABLE.

- 规范**
- 1. 电器:**
 UL应用最大:250VOLTS AC.
 介质耐电压伏特数:1000 VOLTS AC.
 耐压时间:60S.
 绝缘阻抗:100百万欧姆.
 终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.
- 2. 机构**
 拉力测试:至少20磅.
 耐力测试:至少200次之插拔测试.

- 3. 材质表面处理**
 塑胶壳:聚碳酸酯,UL-94V-0 or UL94V-2.
 颜色:透明,或者其他颜色亦可.
 金片:铜合金.
 导体:多股线&单股线,24AWG,26AWG.
 (芯线直径: φ0.96- φ1.02均可适用)
 镀金厚度:3u"~50u",皆可提供.



客户用产品图

BLADE:	E	EB	Y	YB	Z	A	AE	AB	EC	AL	ZL	YBL
Drawing												
Mark					✓							
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"						
Mark						✓						
								CABLE TYPE		ROUND	FLAT	
								Mark	✓			



宁波卓新通讯连接器有限公司
 NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

DIMENSION IN mm (Inch)	材质	图号
TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL	DWG NO.
X±0.20	PC	PLUG-060-0010
.XX±0.10		
.X°±5°	名称	名称
.XX°±2°	TITLE	P88RZ50V2

审核	核对	制图	比例	张数
沈红波	轴均江	Cathyli	2/1	1/1
Approval	Checked	Drawn	SCALE	SHEET
			角法	更改
			REV	A

ST-DR-009A