NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

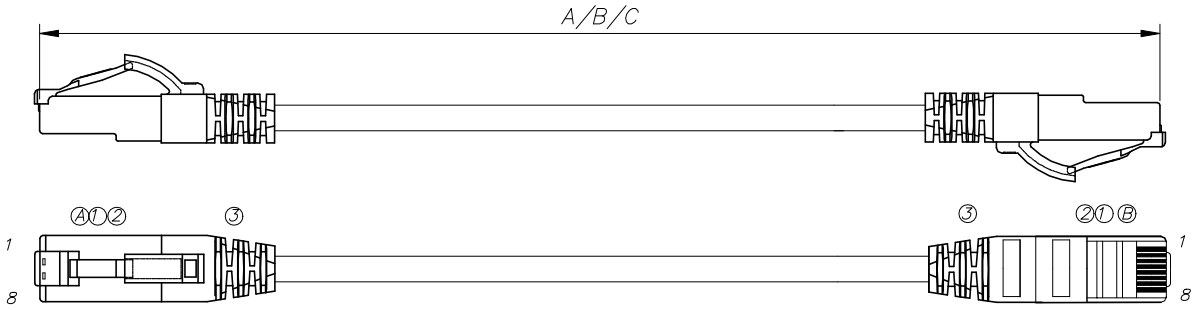

PLUG:

Drawing						
Mark					✓	

GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"
Mark						✓

TYPE	Shielded	Unshielded
Mark		✓

PC	UL 94-V0	UL 94-V2
Mark		✓

The cable / plug / molding with antibacterial material.
Antimicrobial activity complies with ISO 22196:2011

ARRANGE METHOD:



RoHS

Issued
2021.11.25
R&D

Remarks:
I. "A" indicate the length 1~9M, tolerance $^{+80}_{-0}$
II. "B" indicate the length 10~20M, tolerance $^{+150}_{-0}$
III. "C" indicate the length above 20M, tolerance +(C*1%)/-0

ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY
①	PLUG	C6RH5Z50V2IL	transparent	2	⑥				
②	Insert	I1.06	transparent	2	⑦				
③	PVC	60P	\	8g	⑧				
④	Cable Tie	"C"MM	white	2	⑨				
⑤					⑩				

WIRE CONNECTION TABLE

MATERIAL			white / orange	orange	white / green	blue	white / blue	green	white / brown	brown
CAT.6 UTP PATCH CORD 24AWG	PVC	✓	A1	A2	A3	A4	A5	A6	A7	A8
	LSOH		B1	B2	B3	B4	B5	B6	B7	B8
CABLE COLOR		red	orange	yellow	green	blue	purple	gray	white	black

LENGTH	TOTAL	MOLD NO.
(A/B/C+80)*[19(0)]*[19(0)]		02-032

DWG NO. P60UTB032-002

TITLE: *Antibacterial Patch Cord-Cat.6 UTP*

UNIT	SCALE	SHEET
mm	1/1	1/1

DRAWN DATE	PROJ.	REV
2013/02/21		1

APPROVAL	CHECKED	DRAWN
Carine	Zach	CathyLi